

数字万用表 P184

数字万用表 P184

DIGITAL MULTIMETER

- 万用表+测温仪
- 3(5/6)位测量精度

Digital multimeter, a multi-purpose electronic measuring instrument, generally includes functions such as ammeter, voltmeter, ohmmeter, etc., sometimes also called multimeter, multimeter, multimeter, or triple meter.




型号		P184	
基本功能		量程	精度
直流电压	mV	40mV/400mV	± (0.5%+2dig)
	V	4V/40V/400V/800V	± (0.8%+2dig)
交流电压	mV	40mV/400mV	± (0.8%+2dig)
	V	4V/40V/400V/550V	± (1%+3dig)
直流电流	mA	40mA/400mA	± (0.8%+2dig)
	A	6A	± (1.2%+3dig)
交流电流	mA	40mA/400mA	± (1%+3dig)
	A	6A	± (1.5%+3dig)
电阻 (Ω)		400 Ω / 4k Ω / 40k Ω / 400k Ω / 4M Ω	± (0.8%+2dig)
		40M Ω	± (1.5%+3dig)
电容		9. 999nF~9. 999 μ F	± (2.5%+3dig)
		9. 999 μ F~999. 9μF	± (3%+3dig)
		999. 9 μ F~99. 99mF	± (5%+3dig)
频率		9. 999Hz~9. 999MHz	± (0.8%+2dig)
尺寸/重量		180x92x50mm/350g	

● 数字万用表是一种外观新颖，把握手感舒适，精度高性能稳定、用电池驱动的高可靠性数字万用表。该仪表使用大屏LCD显示器读数清晰、更加方便使用，是电子工程师和电子维修界的最佳必备神器！



图一

- 数字多用表(DMM)是在电气测量中要用到的电子仪器。它可以有很多特殊功能，但主要功能就是对电压、电阻和电流进行测量，数字多用表，作为现代化的多用途电子测量仪器，主要用于物理、电气、电子等测量领域。

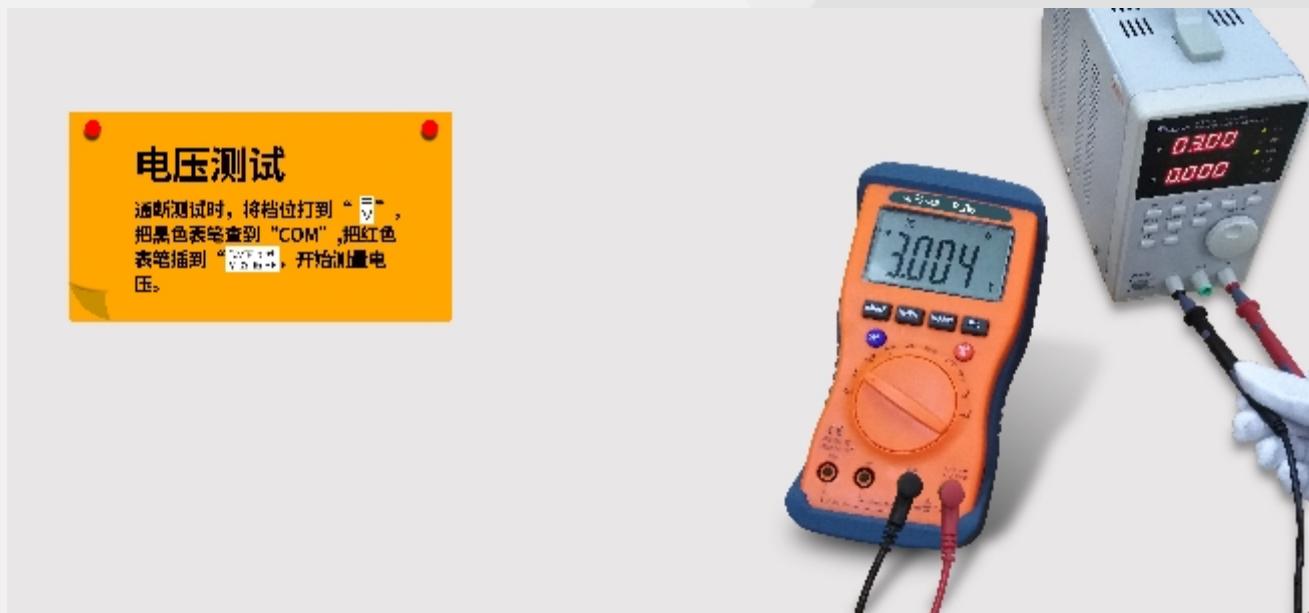

图二

● 应用

电子测试工程、专业实验室、科研院所、试验教学、安规测试、工业自动化、配电、电子等领域。

● 配件

