



**Ball valve, manually actuated,
DN 10 ISO-KF**






Ball valve, manually actuated, DN 10 ISO-KF

- Ball valve with large-scale free clearance
- Ball made from stainless steel (1.4401)

Dimensions

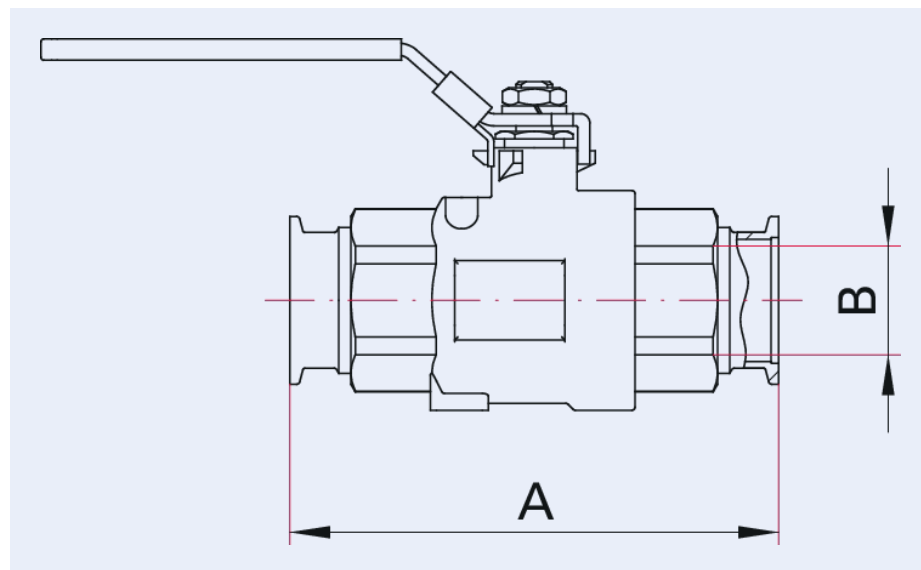

A	100 mm
B	10 mm

Technical Data

Ball valve, manually actuated, DN 10 ISO-KF

Temperature range min.	-20 °C
Temperature range max.	80 °C
Flange, material	Stainless steel 1.4301 (AISI 304)
Seal	PTFE PTFE (glass fiber reinforced)
Type	Ball valve
Temperature range	-20 – 80 °C
Housing	Stainless steel 1.4408
Actuator	90° rotation of hand lever
Tightness	$<1 \cdot 10^{-7} \text{ Pa m}^3 / \text{s}$ $<1.33 \cdot 10^{-5} \text{ Torr l/s}$ $<1 \cdot 10^{-5} \text{ mbar l/s}$
Connection flange	DN 10 ISO-KF
Pressure range	1E-5 hPa – 5E2 hPa over pressur · 10

Order number	Ball valve, manually actuated, DN 10 ISO-KF
Ball valve, manually actuated, DN 10 ISO-KF	120VKZ010

Your Success. Our Passion.

We give our best for you every day –
worldwide!

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum Components & Solutions GmbH Germany

T +49 551 99963-0

info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 7/4/2024

Follow Us On Social Media
#pfeiffervacuum



PFEIFFER  **VACUUM**

www.pfeiffer-vacuum.com