

数字钳形表 A105

高安全性·性能稳定·可靠性
全量程过载保护

Famous brand PinTech products, instruments and meters, the top brand in the global oscilloscope probe oscilloscope probe technical standards advocate, founder of the "two floating voltage test, tek Tektronix, is DE Keysight, rod and Schwartz R&S probe oscilloscope manufacturers, such as global strategic cooperation suppliers.


性能参数参考		
基本功能	量程	基本精度
型号	A105	
交流电流 (A)	600A/2500A	± (1.5%+5)
直流电流 (A)	600A/2500A	± (1.5%+5)
交流电压 (V)	6V/60V/600V/1000V	± (1.2%+5)
直流电压 (V)	6V/60V/600V/1000V	± (0.5%+2)
电阻(Ω)??	600 Ω /6K Ω /60K Ω /600K Ω /6M Ω /60M Ω	± (1%+2)
电容(F)	60nF/600nF/6uF/60uF/600uF/6000uF/60mF	± (3.0%+5)
频率(Hz)	60Hz/600Hz/6kHz/60kHz/600kHz/6MHz/60MHz	± (0.1%+3)
摄氏温度(° C)	-40° C ~ 1000° C	± (1.0%+8)
华氏温度(° F)	-40° F ~ 1832° F	± (1.0%+12)
特殊功能		
最大显示	6000	
动量程		√
开口尺寸	63mm	
真有效值	交流电压/ 交流电流	√
占空比	0.1%~99.9%	√
二极管测试		√
通断蜂鸣		√
交流 + 直流		√
低通滤波		√
浪涌电流	交流电流	√
数据保持		√
最大/最小值		√
数据存储	1000	
LCD 背光		√
模拟条	61	
全符号显示		√
自动关机		√
低电压显示		√
输入阻抗	≥10M Ω	√
电流输出功能		√

- 数字钳形表A105,工作电压1000V, DC/AC测量的霍尔效应传感器，全量程过载保护和独特的外观设计，使之成为性能更为卓越的新一代实用电工测量仪表。



图一

- 数字钳形表是集电流互感器与电流表于一身的仪表，是数字万用表的一个重要分支，其工作原理与电流互感器测电流是一样的。数字钳形表是由电流互感器和电流表组合而成。

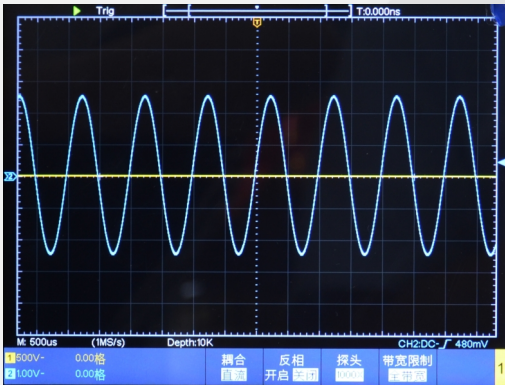

图二

●应用

强电或高压隔离测量
电源转换等相关设计
焊接、电镀电源
变频家电
电机驱动设计
CRT显示器设计
低压电器试验

●配件



温度探头



表笔

