


# CMC 353

Compact and Versatile Three-Phase Relay Testing Solution

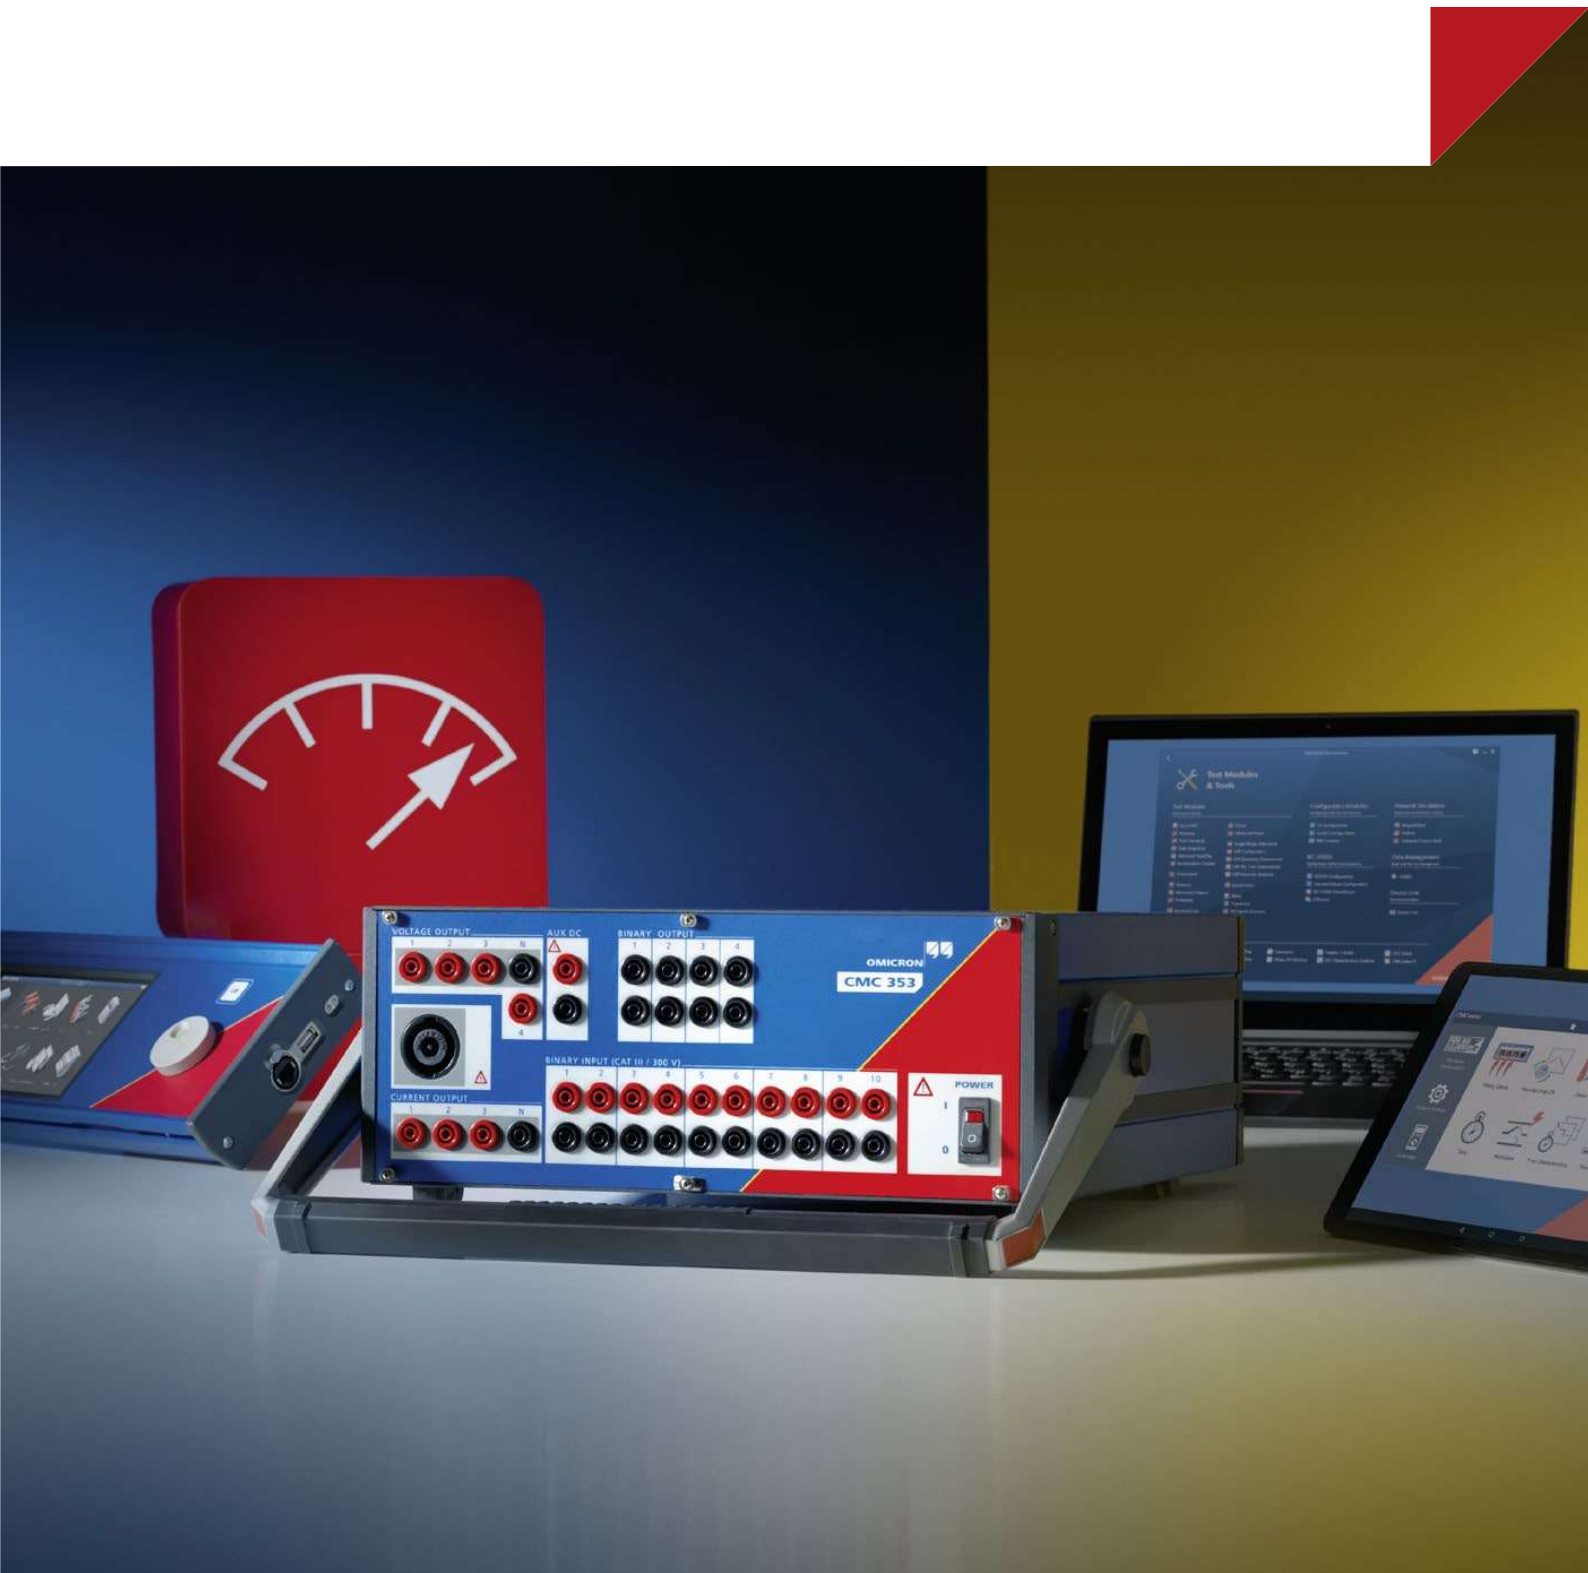

# Compact and versatile relay testing

With its compact design and low weight of 13.3 kg / 29.3 lbs, the CMC 353 provides the perfect combination of portability and power. It is the ideal test set for three-phase protection testing and the commissioning of SCADA systems. The powerful current outputs (3 x 32 A / 430 VA) optimally support 5 A relay testing.

The portable design makes this device an excellent choice for commissioning and maintenance tasks, particularly in industry, distributed generation, medium and low voltage applications. It meets a wide variety of challenges in protection engineering from testing electromechanical relays to the latest IEC 61850 IEDs.

## Safe and future-proof

The three current and four voltage output channels of the CMC 353 are continuously and independently adjustable in amplitude, phase and frequency. All outputs are protected against over-temperature, accidental short-circuits, external high-voltage transient signals and are monitored in case of overload.

The integrated network interface supports comprehensive testing in IEC 61850 environments using optional GOOSE simulation and subscription as well as Sampled Values simulation functionality. It is also possible to retrieve, evaluate and log the IED Client/Server SCADA communication according to IEC 61850.



## Varied applications

Up to 12 independent channels of low-level signals are available on the rear of the test set, which can be used to test relays with non-conventional sensor inputs (for example, Rogowski coils) or to control external amplifier units.

Time synchronized applications according to IEEE 1588 are possible, for example, via CMGPS 588. The GPS controlled time reference with integrated antenna works as a Precision Time Protocol (PTP) grandmaster clock and is optimized for outdoor usage.

## Connectivity options

The CMC 353 is designed to work with OMICRON's most powerful software tools. Users can control the test set using either a Windows PC/laptop or an Android tablet and connect via Ethernet/USB cable or Wi-Fi (through the optional mini wireless USB adapter).

## Organize your tests

For centralized planning, tracking and managing of all engineering, testing and maintenance activities in the power industry, the ADMO software<sup>1</sup> ensures that the workflows of asset and operations managers, testers, and protection engineers are structured and coordinated. Key data will be kept up-to-date and available to all employees at all times.



## Your benefits

- > Compact and lightweight design providing a high degree of portability
- > High current amplitudes for 5 A relay testing
- > High accuracy and versatility for testing digital and static relays of all types
- > Integrated network interface for testing IEC 61850 IEDs

[www.omicronenergy.com/CMC353](http://www.omicronenergy.com/CMC353)

<sup>1</sup> ADMO light is included with every Test Universe package

# Control options tailored to your needs



*"Ideal solution for ..."*



## Manual settings-based testing with CMControl



**CMControl P** is the entry-level CMC operation platform specifically designed for easy manual settings-based testing of protection and measurement devices.

- > Simple and fast testing with intuitive user guidance
- > Reduced testing efforts, increased productivity
- > No special training required

[www.omicronenergy.com/cmcontrol](http://www.omicronenergy.com/cmcontrol)

*"... fast and easy manual testing with low initial effort"*

## Advanced settings-based testing with Test Universe



**Test Universe** is made for advanced testing and offers a wide range of application-optimized test modules. Customized templates allow users to achieve a high degree of automation and standardization.

- > Fully automated settings-based protection testing
- > Flexible test plans
- > Function specific modules

[www.omicronenergy.com/testuniverse](http://www.omicronenergy.com/testuniverse)

*"... frequent and recurring testing, a wide application range and greater depth of testing"*

## Innovative system-based testing with RelaySimTest



The innovative system-based testing approach of **RelaySimTest** allows the verification of the whole protection system with a higher testing quality than ever before.

- > Logic and scheme testing with outstanding troubleshooting capabilities
- > Supports easy end-to-end testing
- > Independent of relay type and settings

[www.omicronenergy.com/relaysimtest](http://www.omicronenergy.com/relaysimtest)

*"... logic testing, scheme testing and troubleshooting tasks"*



Achieve the highest level of system reliability **using a combination** of settings-based and system-based testing.



➔ Use the full potential of your CMC with ...




### ... Protection Testing Library (PTL)

The PTL provides predefined test templates for more than 400 protection relays from various manufacturers. The templates can be adapted and extended. Studies have shown that utilizing fully automated templates **can reduce testing time by up to 70%** compared to manual testing.

- > Saves time and effort compared to manual creation of test plans
- > Manual or automatic transfer of relay settings directly from the relay manufacturer's software
- > Test templates and relay parameter converters (XRIO) customizable for individual requirements

[www.omicronenergy.com/ptl](http://www.omicronenergy.com/ptl)



### ... IEC 61850 testing modules

The IEC 61850 modules enable protection testing to be carried out in the same way as with conventional binary and analog signals using GOOSE, Sampled Values and Client/Server communication.

- > Publishing and Subscribing GOOSE messages
- > Publishing Sampled Values streams
- > Protection Testing with accessing the Data Model and Client/Server communication (SCADA)

[www.omicronenergy.com/puc](http://www.omicronenergy.com/puc)



# Testing software packages and add-ons

A wide range of testing software is available consisting of Test Universe modules and additional tools. We have bundled typical testing requirements into useful software packages, but each package can of course be adapted to individual needs.

- Essential** offers a good introduction with basic functions and modules; can serve as a base for custom compiled packages
- Standard** contains all modules that are typically used for settings-based testing of protection devices
- Enhanced** like Standard, specifically extended by functions for system-based testing and transient simulation as well as for free programming

		Packages			Add-ons	
		Essential	Standard	Enhanced	Measurement Equipment Testing IEC 61850 Basic	IEC 61850 Advanced
Test Universe modules	OMICRON Control Center <sup>1</sup>	■	■	■		
	QuickCMC	■	■	■		
	State Sequencer	■	■	■		
	TransPlay	■	■	■		
	Harmonics	■	■	■		
	CB Configuration	■	■	■		
	Ramping	■	■	■		
	Pulse Ramping	□	■	■		
	Overcurrent <sup>2</sup>	□	■	■		
	Distance	□	■	■		
	Advanced Distance	□	■	■		
	VI Starting	□	■	■		
	Autoreclosure	□	■	■		
	Single-Phase Differential	□	■	■		
	Advanced Differential	□	■	■		
	Annunciation Checker	□	■	■		
	Power	□	■	■		
	Advanced Power	□	■	■		
	Advanced TransPlay	□	■	■		
	Transient Ground Fault <sup>3</sup>	□	□	■		
	Synchronizer	□	□	■		
	Meter	□	□	□	■	
	PQ Signal Generator	□	□	□	■	
	IEC 61850 Client/Server	□	□	□		■ ■
	GOOSE Configuration	□	□	□		■ ■
	Sampled Values Configuration	□	□	□		■
Additional tools	CMControl P App	□	■	■		
	RelaySimTest <sup>3</sup>	□	□	■		
	CM Engine	□	□	■		
	TransView	□	□	□		
	ADMO light <sup>4</sup>	■	■	■		
	IEDScout	□	□	□		■ ■

Contained in all packages: Binary I/O Monitor, AuxDC Configuration, ISIO Connect (for ISIO 200), Polarity Checker (for CPOL2).

<sup>1</sup> Includes licenses for Pause Module, ExeCute, TextView

<sup>2</sup> Includes license for Overcurrent Characteristics Grabber


<sup>3</sup> RelaySimTest license also includes the licenses for Transient Ground Fault and NetSim

<sup>4</sup> ADMO light is limited to 50 assets but can be upgraded to a full ADMO version at any time








■ Contained  
□ Optionally available

# CMC 353 accessories

The following accessories are included with the CMC 353 standard delivery but can also be ordered separately.

	Description	Order No.
	> Country-specific power cord 3 m / 9.8 ft	E1664300
	> Ethernet patch cable 1.5 m / 4.9 ft	E1664400
	> Ethernet patch cable 3 m / 9.8 ft	B1021101
	> USB connection cable 2 m / 6.6 ft	P0006168
	> Leads with 4 mm safety plugs (6 x red, 6 x black) 2 m / 6.6 ft	E0439201
	> Flexible terminal adapters (12 x black)	P0006167
	> Flexible test lead adapters with retractable sleeve (6 x red, 6 x black)	B0349701
	> Grounding cable with battery clamp and M6 cable lug 6 m / 19.7 ft	E0659401
	> Soft bag	

## Optional accessories<sup>1</sup>

	Description	Order No.
	<b>CMC wiring accessory package</b> For connecting test objects to CMC test sets, consisting of:	B1764601
	> 12 flexible test lead adapters for connections to narrow terminals	
	> 12 flexible test lead adapters with retractable sleeve for connections to non-safety sockets	
	> 4 flexible jumpers for paralleling current outputs or shorting neutrals of binary inputs	
	> 8 crocodile clips for contacting pins or screw bolts	
	> 12 flexible terminal adapters for screw-type terminals	
	> 20 cable lug adapters for M4 (0.15 in) screws	
	> 10 cable lug adapters for M5 (0.2 in) screws	
	> 10 cable ties 150 mm / 5.9 in long	
	> 1 accessory bag	
	<b>Mini wireless USB adapter</b> For wireless control of the CMC 353. <sup>2</sup>	E1636800
	<b>Generator combination cable</b> Connection between the generator combination plug of the CMC 353 to the test object.	B1328100
	<b>Transport case</b> Heavy-duty transport case with wheels and extendable handle.	B0679500
	<b>CMGPS 588</b> GPS controlled time reference with integrated antenna. It is optimized for outdoor usage and works as a PTP grandmaster clock according to IEEE 1588-2008, IEEE C37.238 (Power Profile), IEC 61850-9-3 (Utility Profile).	P0006433
	<b>CMLIB REF 6xx</b> Interface adapter for testing ABB protection relays for example, ABB REF615 with Rogowski inputs. <sup>3</sup>	P0006379
	<b>CPOL 2 polarity checker</b> For checking a series of terminals for correct wiring. The signal can be injected into the primary side of a CT. Thus, the correct polarity of CT wiring can be included in the test.	P0006331

<sup>1</sup> Non-exhaustive list. For the complete list please visit our website: [www.omicronenergy.com/cmc353](http://www.omicronenergy.com/cmc353)

<sup>2</sup> Requires a CMC test set with NET-2 interface board.

Wi-Fi is subjected to technical and legal constraints. For more information please contact your local OMICRON office or sales partner.


<sup>3</sup> More interface adapters for other relays with sensor inputs are also available

# Overview of technical specifications<sup>1</sup>

## CMC 353

### Current amplifier

Setting range	3-phase AC (L-N)	3 x 0 ... 32 A
	1-phase AC (L-L)	1 x 0 ... 32 A
	1-phase AC (LL-LN)	1 x 0 ... 64 A
	DC (LL-LN)	1 x 0 ... 64 A
Power	3-phase AC (L-N)	3 x 430 VA typ. at 25 A 3 x 250 W guar. at 20 A
	1-phase AC (L-L)	1 x 870 VA typ. at 25 A 1 x 530 W guar. at 20 A
	1-phase AC (LL-LN)	1 x 500 VA typ. at 40 A 1 x 350 W guar. at 40 A

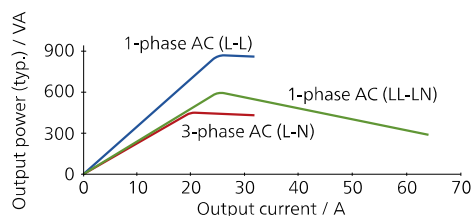


Accuracy	Error < 0.05 % rd. <sup>2</sup> + 0.02 % rg. <sup>2</sup> typ. Error < 0.15 % rd. + 0.05 % rg. guar.
Distortion (THD+N) <sup>3</sup>	< 0.05 % typ., < 0.15 % guar.
Resolution	1 mA
Max. compliance voltage (L-N)/(L-L)	35 Vpk / 70 Vpk

### Amplifiers, general

Frequency	Range sine signals <sup>4</sup>	10 ... 1000 Hz
	Range harmonics / interharmonics	Voltage: 10 ... 3000 Hz <sup>5</sup> Current: 10 ... 1000 Hz
	Range transient signals	DC ... 3.1 kHz <sup>5</sup>
	Resolution	< 5 µHz
Phase	Resolution	0.001°
	Error at 50 / 60 Hz	Voltage: 0.02° typ., < 0.1° guar. Current: 0.05° typ., < 0.2° guar.
Bandwidth (-3 dB)		3.1 kHz

### Voltage amplifier

Setting range	4-phase AC (L-N)	4 x 0 ... 300 V
	2-phase AC (L-L)	2 x 0 ... 600 V
	DC (L-N)	4 x 0 ... ±300 V
Power	4-phase AC (L-N)	4 x 75 VA typ. at 100 ... 300 V 4 x 50 VA guar. at 85 ... 300 V
	3-phase AC (L-N)	3 x 100 VA typ. at 100 ... 300 V 3 x 85 VA guar. at 85 ... 300 V
	1-phase AC (L-L)	1 x 275 VA typ. at 200 ... 600 V 1 x 250 VA guar. at 200 ... 600 V

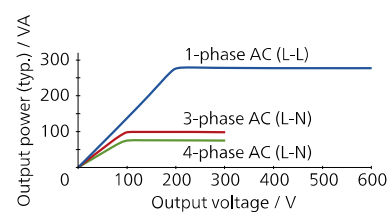

Accuracy (at 0 ... 300 V)	Error < 0.03 % rd. <sup>2</sup> + 0.01 % rg. <sup>2</sup> typ. Error < 0.08 % rd. + 0.02 % rg. guar.
Distortion (THD+N) <sup>3</sup>	0.015 % typ., < 0.05 % guar.
Resolution	5 mV / 10 mV in range 150 V / 300 V
Ranges	150 V / 300 V

### Low level outputs

Number of outputs	6 (12 with Option LLO-2)
Setting range	0 ... ±10 Vpk

### Auxiliary DC supply

Voltage ranges, max. current	0 ... 264 VDC, 0.2 A
	0 ... 132 VDC, 0.4 A
	0 ... 66 VDC, 0.8 A

### Binary inputs

Number	10 (5 potential groups)
Trigger criteria	Toggling of potential-free contacts or DC voltage compared to threshold voltage
Ranges	20 V / 300 V
Sample rate	10 kHz (resolution 100 µs)

### Binary outputs

Type	4 relay 4 transistor
Relay breaking capacity	Imax: 8 A / Pmax: 2000 VA at 300 VAC Imax: 8 A / Pmax: 50 W at 300 VDC

<sup>1</sup> The full technical specifications are available on request. All data specified are guaranteed, except where indicated otherwise. OMICRON guarantees the specified data for one year after factory calibration, within 23 °C ± 5 °C / 73 °F ± 10 °F in the frequency range from 10 to 100 Hz and after a warm-up phase > 25 minutes

<sup>2</sup> rd. = reading, rg. = range

<sup>3</sup> THD+N: Values at 50/60 Hz, 20 kHz measurement bandwidth

<sup>4</sup> For current outputs amplitude derating at > 380 Hz

<sup>5</sup> Amplitude derating at > 1000 Hz





## IEC 61850<sup>1</sup>

### Publishing

GOOSE	360 virtual binary outputs, 128 GOOSEs
Sampled Values	IEC 61850-9-2 („9-2LE“), IEC 61869-9

### Subscribing

GOOSE	360 virtual binary inputs, 128 GOOSEs
-------	---------------------------------------

### Maximum number of streams

Publishing	RelaySimTest: 4, Test Universe: 3 (1 stream: 4 V + 4 I)
------------	--

## Time synchronization

### Internal system clock

Frequency drift	< 0.37 ppm / 24 h < 4.6 ppm / 20 years
-----------------	---

### CMC 353s to external reference

Absolute timing accuracy (voltage/ current)	< 1 µs typ., < 5 µs guar.
To external voltage	Reference signal on binary input 10: 10 ... 300 V / 15 ... 70 Hz
Precision Time Protocol (PTP)	IEEE 1588-2008 IEEE C37.238 (Power Profile) IEC 61850-9-3 (Utility Profile)

### CMC 353 to test objects

IRIG-B, PPS, PPX	Via CMIRIG-B, TICRO 100
------------------	-------------------------

## Power supply

Nominal input voltage	100 ... 240 VAC, 1-phase (50/60 Hz)
-----------------------	-------------------------------------

## Environmental conditions

Operation temperature <sup>2</sup>	0 ... +50 °C / +32 ... +122 °F
Storage temperature	-25 ... +70 °C / -13 ... +158 °F
Humidity range	Relative humidity 5 ... 95 %, non-condensing

## Equipment reliability

### Electromagnetic interference (EMI)

International / Europe	IEC/EN 61326-1, IEC/EN 61000-6-4, IEC/EN 61000-3-2/3, CISPR 32 (Class A)/EN 55032 (Class A)
North America	47 CFR 15 Subpart B (Class A) of FCC

### Electromagnetic susceptibility (EMS)

International / Europe	IEC/EN 61326-1, IEC/EN 61000-6-2/5, IEC/EN 61000-4-2/3/4/5/6/8/11/16/18
------------------------	--

### Safety

International / Europe	IEC/EN 61010-1, IEC/EN 61010-2-030
North America	UL 61010-1, UL 61010-2-030, CAN/CSA-C22.2 No. 61010-1, CAN/CSA-C22.2 No. 61010-2-030

### Mechanical tests

Vibration	IEC 60068-2-6
Shock	IEC 60068-2-27

## Miscellaneous

Weight	13.3 kg / 29.3 lbs
Dimensions (W x H x D, without handle)	343 x 145 x 390 mm / 13.5 x 5.7 x 15.4 in
PC connection	2 PoE (Power over Ethernet) ports USB Type-B port (PC) USB Type-A port (optional Wi-Fi adapter for wireless control)

## Certifications

Developed and  
manufactured under an  
ISO 9001 registered system



<sup>1</sup> The GOOSE and Sampled Values functionality require software licences for the respective configuration modules

<sup>2</sup> For an operational temperature above +30 °C / +86 °F a duty cycle of down to 50 % may apply

We create customer value through ...


## — Quality —

You can rely on the highest safety and security standards



Superior reliability with up to

72



hours burn-in tests before delivery

100%

routine testing for all test set components



ISO 9001  
TÜV & EMAS  
ISO 14001  
OHSAS 18001



Compliance with international standards

## — Innovation —




... a product portfolio tailored to my needs

More than

200

developers

keep our solutions up-to-date



More than

15%

of our annual sales is reinvested in research and development



Save up to

70%


testing time through templates, and automation




## — Support —




Professional technical support at any time

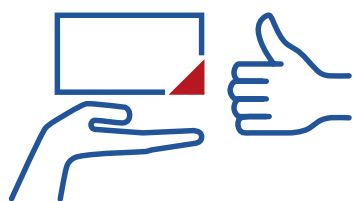

Loaner devices  
help to reduce  
downtime

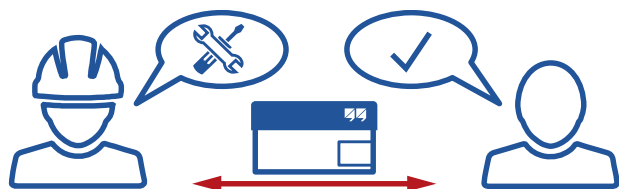

Cost-effective and straight-forward repair  
and calibration

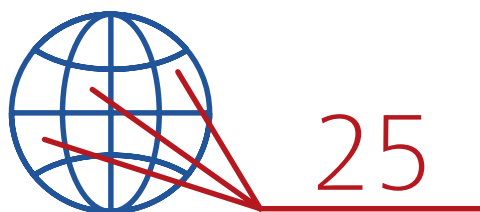

offices worldwide for local contact and  
support

## — Knowledge —

More than

300




Academy and numerous hands-on  
trainings per year

Frequently OMICRON  
hosted user meetings,  
seminars and  
conferences



to thousands of technical papers and  
application notes

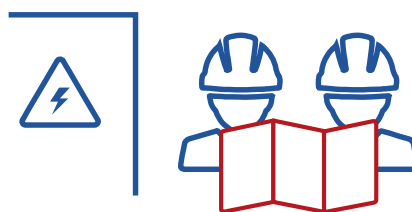


Extensive expertise in consulting, testing  
and diagnostics

OMICRON is an international company that works passionately on ideas for making electric power systems safe and reliable. Our pioneering solutions are designed to meet our industry's current and future challenges. We always go the extra mile to empower our customers: we react to their needs, provide extraordinary local support, and share our expertise.

Within the OMICRON group, we research and develop innovative technologies for all fields in electric power systems. When it comes to electrical testing for medium- and high-voltage equipment, protection testing, digital substation testing solutions, and cybersecurity solutions, customers all over the world trust in the accuracy, speed, and quality of our user-friendly solutions.

Founded in 1984, OMICRON draws on their decades of profound expertise in the field of electric power engineering. A dedicated team of more than 900 employees provides solutions with 24/7 support at 25 locations worldwide and serves customers in more than 160 countries.

The following publications provide further information on the solutions described in this brochure:



Product catalog



RelaySimTest



ADMO

For more information, additional literature, and detailed contact information of our worldwide offices please visit our website.